
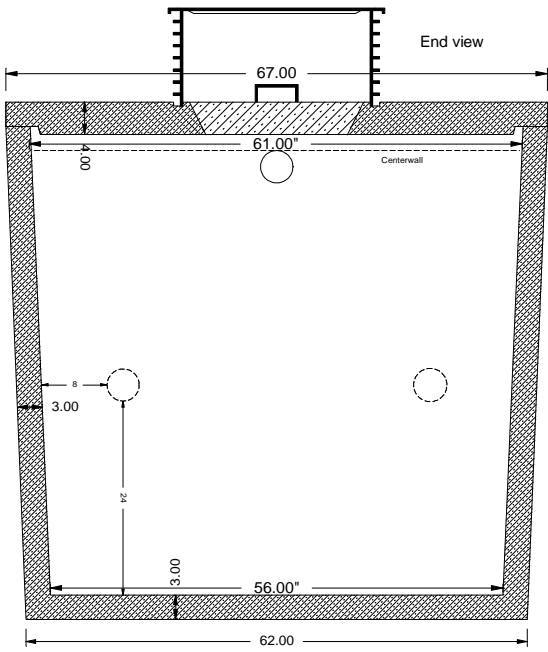


M-1 Tanks Inc.  
1500 Gallon Standard LOWeFLOW Tank

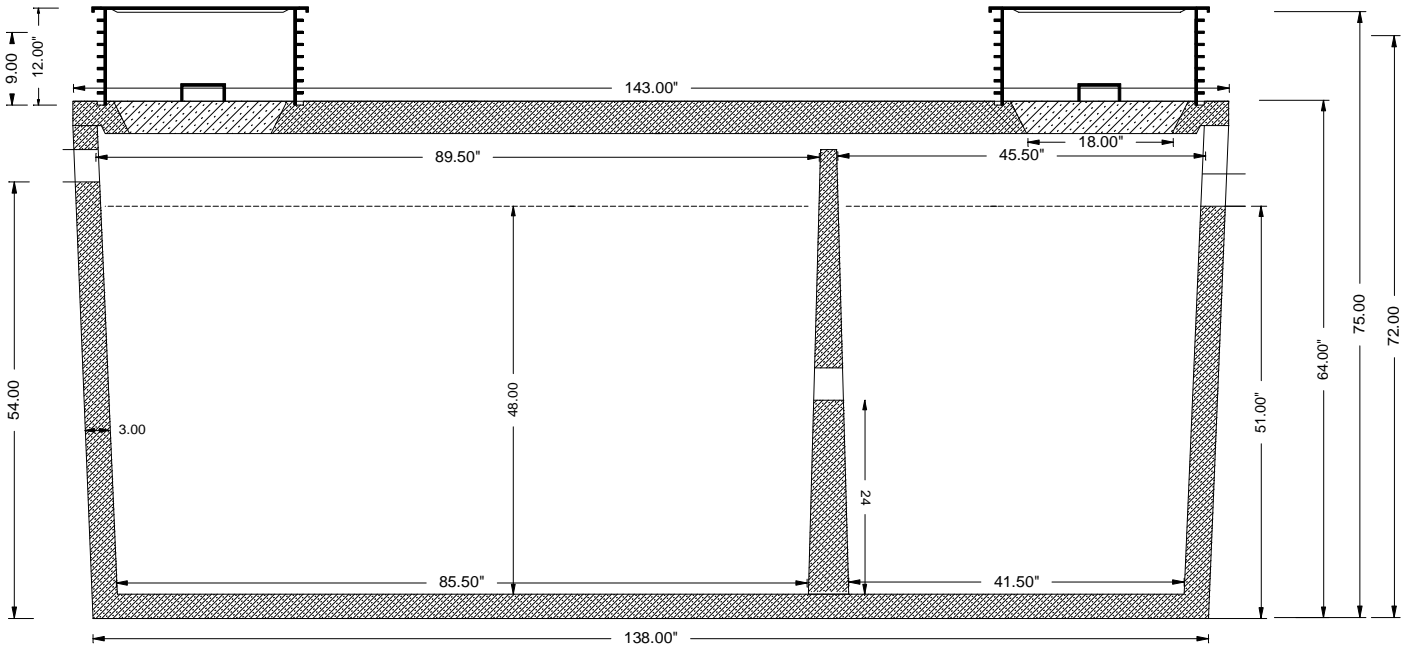

- Tank joint sealed with CS 101 butyl rubber sealant
- Tank is constructed of reinforced concrete with a minimum compressive strength of 5000 psi
- Tank is designed to support 3' of burial depth plus a 2500 lb. wheel load
- Risers and lids are not designed for wheel traffic however they have been tested with loads that significantly exceed 2500 lbs.
- Rubber pipe seals with stainless steel clamps are designed to meet or exceed ASTM C-1644